


Mardome Reflex












TB185 Refurbishment Dome

Contents **!** Take care when unpacking **!** Check all correct parts are included and undamaged **!** Only use fixings supplied

Fixing Quantities	
Length of Nominal Dome Side (mm)	Number of fixings per side
600, 750	2
900, 1050, 1200	3
1350, 1500, 1650	4
1800, 1950	5
2100, 2250	6
2400	7

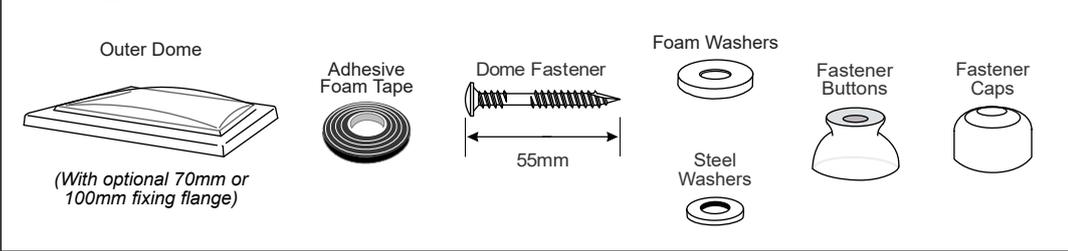

! All Health & Safety Regulations must be followed on site throughout the installation process

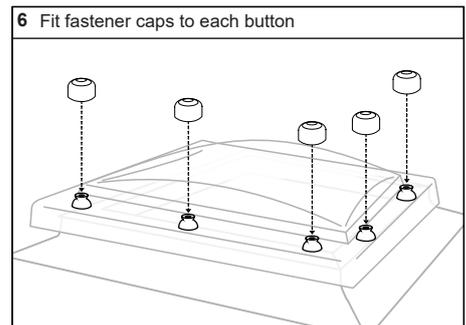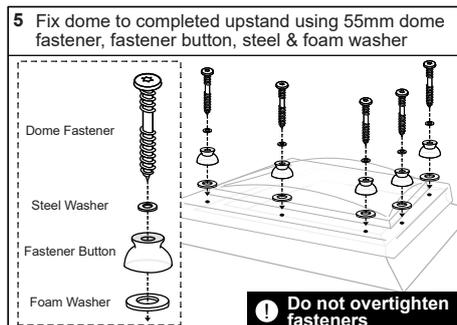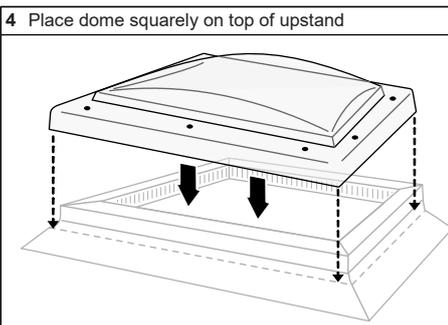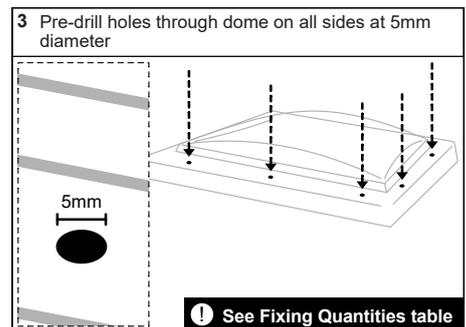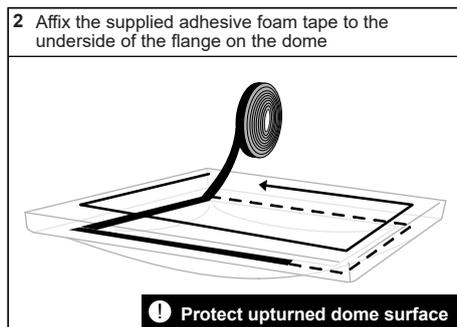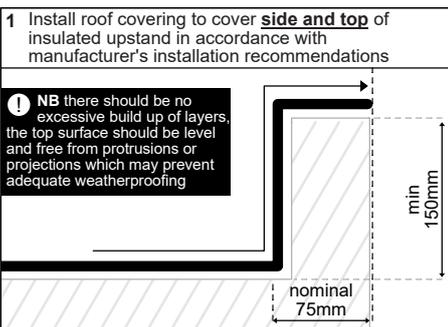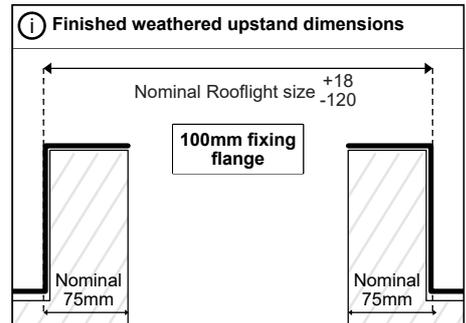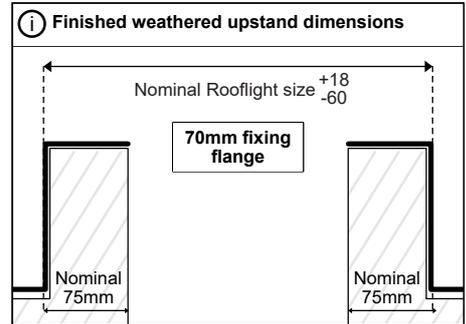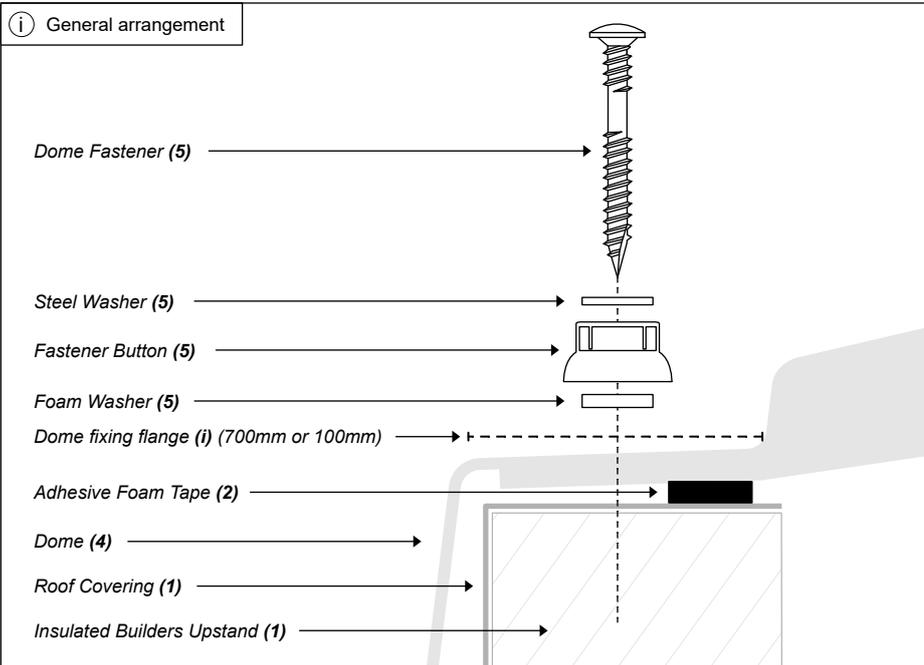

! TECHNICAL SUPPORT: For any technical information/queries please contact your supplier. The manufacturer operates a policy of continuous product improvement, and reserves the right to alter specifications at any time without notice. Every effort has been taken to ensure all details contained in this document are correct at the time of going to press but this document should be used only as a guide and does not in any way form part of a contract or warranty. It is the customer's responsibility to ensure that the product is suitable for the actual conditions of use, which are beyond the control of the manufacturer.




Mardome Circular



TB185 Circular Dome

Contents **!** Take care when unpacking **!** Check all correct parts are included and undamaged **!** Only use fixings supplied

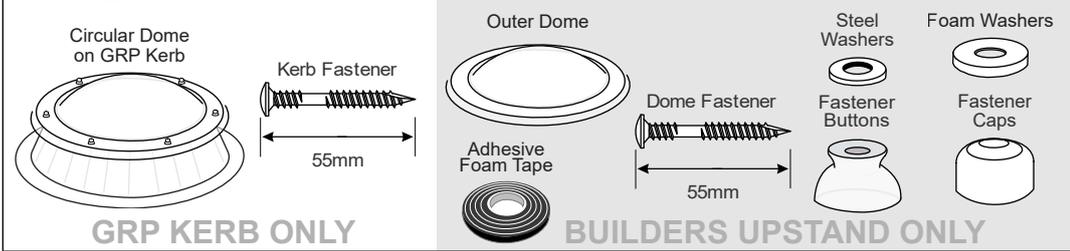


Fixing Quantities	
Nominal diameter of Dome (mm)	Number of fixings (minimum)
600	6
750	8
900	9
1050	10
1200	12
1350	14
1500	15
1800	20

Equal spacing between fixings (approximately 300mm)


! All Health & Safety Regulations must be followed on site throughout the installation process

GRP KERB ONLY


1 Mastic/Silicone around the edge of the roof opening

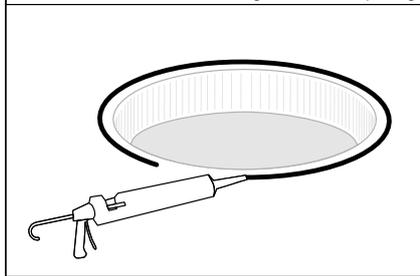


2 Place kerb accurately over roof opening

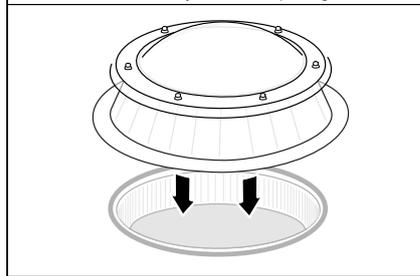

3 Fit kerb to roof using 55mm kerb fasteners

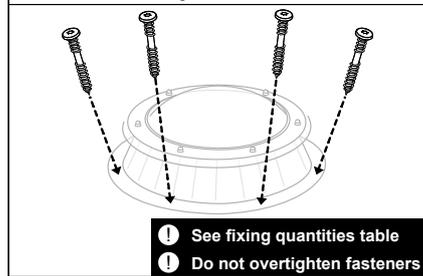


4 Install roof covering to cover kerb in accordance with manufacturers installation recommendations

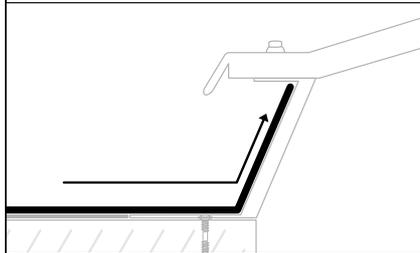


BUILDERS UPSTAND ONLY
(refer to General Arrangement illustration on page 1 for further information)


1 Install roof covering to cover **side and top** of insulated upstand in accordance with manufacturer's installation recommendations

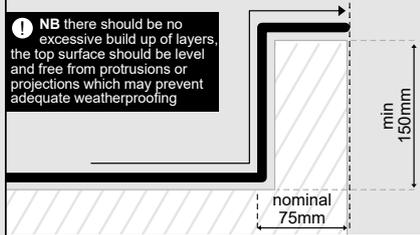


2 Affix the supplied adhesive foam tape to the underside of the flange on the dome

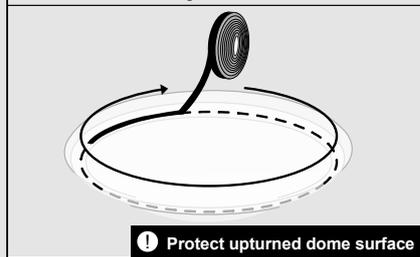


3 Pre-drill holes through dome on all sides at 5mm diameter

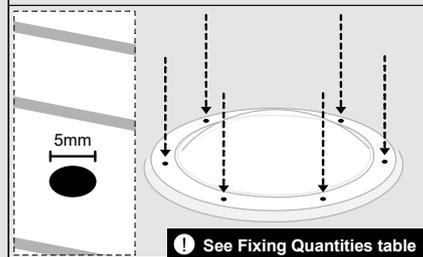


4 Place dome accurately on top of upstand

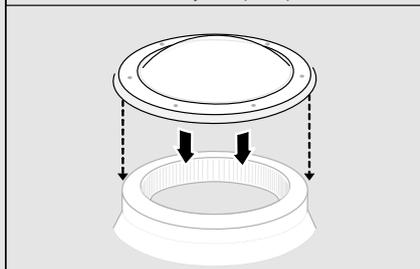

5 Fix dome to completed upstand using 55mm dome fastener, fastener button, steel & foam washer

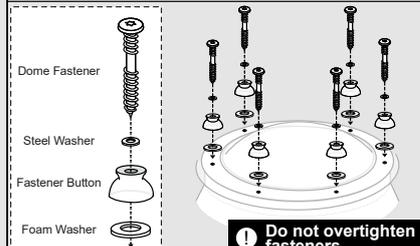

6 Fit fastener caps to each button

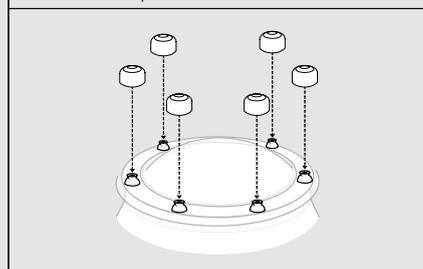

! TECHNICAL SUPPORT: For any technical information/queries please contact your supplier.

The manufacturer operates a policy of continuous product improvement, and reserves the right to alter specifications at any time without notice. Every effort has been taken to ensure all details contained in this document are correct at the time of going to press but this document should be used only as a guide and does not in any way form part of a contract or warranty. It is the customer's responsibility to ensure that the product is suitable for the actual conditions of use, which are beyond the control of the manufacturer.